

**MINS CO., LTD.**

No.67, Gaoshuang Rd., Pingzhen City, Taoyuan County 324,  
Taiwan (ROC)


Tel : 886-3-4021676

Fax : 886-3-4024086

<http://www.yaba.com.tw>

E-mail : [yabamaster@yaba.com.tw](mailto:yabamaster@yaba.com.tw)

## Auto Gain Active Twisted Pair Transmission

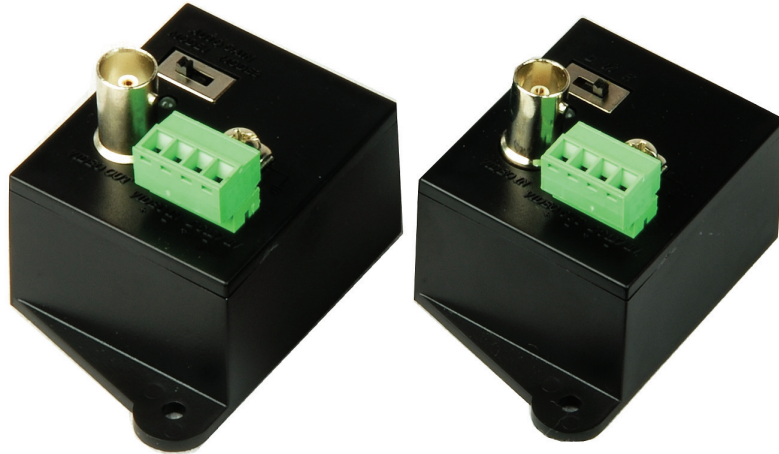

- To send a full motion color video signal up to 2KM over UTP cable with WR-TTA111VA.
- Transmitter built in L, M, and H high frequency video gain.
- Built in two mode auto gain control at receiver.
- Built in transient protection and ground lifting, damaging voltage spike problems are eliminated.
- Perfect for high resolution TVL camera.

| ITEM NO.          | WR-TTA111VT   |
|-------------------|---|
| Video Format      | NTSC / PAL  |
| Video Input       | BNC x 1 (75 Ω · 1 Vp-p)   |
| Video Output      | 4 pin removable terminal x 1 (100 Ω · Max 3 Vp-p)               |
| Switch            | Slide switch x 1  |
| Power Supply      | DC 12V 500mA  |
| Power Consumption | 75 mA ( Max)  |
| Temperature       | Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95% |
| DIMENSIONS        | 43.2 × 74 × 45.2 mm   |
| WEIGHT            | 55 g  |

| ITEM NO.          | WR-TTA111VHA  |
|-------------------|---|
| Video Standard    | NTSC / PAL  |
| Video Input       | 4 pin removal terminal x 1 (100Ω · 1 Vp-p)                      |
| Video Output      | BNC x 1 (75 Ω · 1 Vp-p)   |
| Link Cable        | CAT.5 (24 AWG)  |
| Power Consumption | 100mA   |
| Power Supply      | DC 12V 500mA  |
| Temperature       | Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95% |
| Dimensions        | 43.2 × 74 × 45.2  |
| Weight            | 45  |